

FLH220T-NS-A8

Mind O≠0, I≠I≠1, S≠5, B≠8.

Supply voltage	10...35 V _{DC}
Reverse polarity protection	built-in
Current consumption	<40 mA
Current load capability	200 mA
Output function	\neg \leftrightarrow \neg
Output polarity	NPN
IO-Link	protocol 1.1
Evaluation principle	static
Resolution	0.2 mm
Switching frequency	1250 Hz
Repeatability	0.01 mm
Sensitivity adjustment	Teach-in button
Impulse lengthening	20 ms
Short circuit protection	built-in, self-resetting
Voltage drop	<1.2 V @ 200 mA
Operating temperature	-10...+45 °C · +15...+114 °F
Ambient light immunity	>100 klx
IP code	IP67
Insulation voltage	500 V
Light source	laser red $\lambda=630$ nm
Laser class	1 (EN 60825-1)
Housing material	zinc die-cast, powder-coated
Switching indicator	LED yellow
Connection	connector M8 Pico
Power-on delay	<0.4 s
Serial mounting	—
Weight	365 g · 12.9 oz.
Tariff code	85365019
Complies with	CE, RoHS



Fork Light Barrier High Resolution laser red · 220 mm fork opening




Warranty Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.



Wiring diagram



Pinout

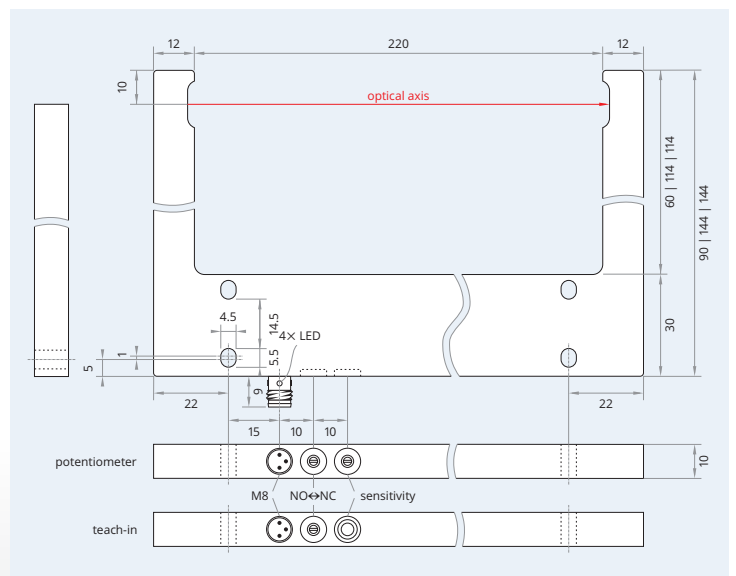

Caution! This device shall not be used if the safety of persons rely on its faultless function.

XECRO reserves the right to make minor changes without prior notification.