

OFT150A-SNS-A8


Mind O≠0, I≠I≠1, S≠5, B≠8.

Supply voltage	10...35 V _{DC}
Reverse polarity protection	built-in
Current consumption	<50 mA
Current load capability	200 mA
Detection principle	static ↔ dynamic
Resolution	3.0 mm
Output function	↘ ↔ ↗
Output polarity	NPN
Response time release time	25 μs
Sensitivity adjustment	270° potentiometer
Impulse lengthening	0...150 ms
Short circuit protection	built-in, self-resetting
Voltage drop	<1.2 V @ 200 mA
Operating temperature	-20...+55 °C · -3...+132 °F
Ambient light immunity	30 klx
IP code	IP67
Insulation voltage	500 V
Housing material	aluminum, black anodized
Impact protector material	aluminum, black anodized
Pane material	polycarbonate
Light source	LED infrared λ=940 nm
Switching indicator	LED yellow
Connection	connector M8 Pico
Weight	682 g · 24.1 oz.
Tariff code	85365019
Complies with	CE, RoHS




25 months Warranty Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.

Wiring diagram

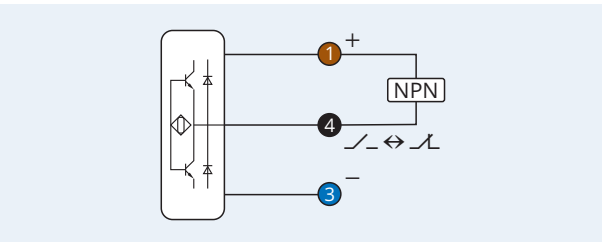


Pinout

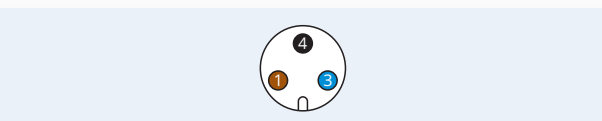

Caution! This device shall not be used if the safety of persons rely on its faultless function.

Frame Light Barrier with Crossbar High Speed Series Active Area: 150×148 mm²

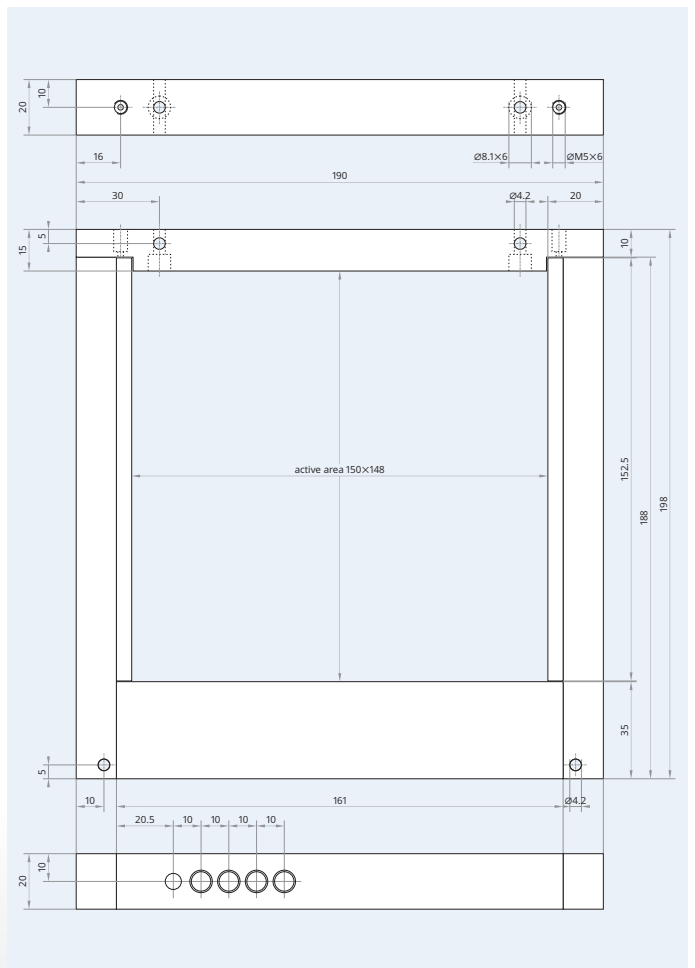

XECRO reserves the right to make minor changes without prior notification.