

## FLH120T-NS-A8

Mind O≠0, I≠I≠1, S≠5, B≠8.

Supply voltage	10...35 V <sub>DC</sub>
Reverse polarity protection	built-in
Current consumption	<40 mA
Current load capability	200 mA
Output function	$\neg$ $\leftrightarrow$ $\neg$
Output polarity	NPN
IO-Link	protocol 1.1
Evaluation principle	static
Resolution	0.2 mm
Switching frequency	5000 Hz
Repeatability	0.01 mm
Sensitivity adjustment	Teach-in button
Impulse lengthening	20 ms
Short circuit protection	built-in, self-resetting
Voltage drop	<1.2 V @ 200 mA
Operating temperature	-10...+45 °C · +15...+114 °F
Ambient light immunity	>100 klx
IP code	IP67
Insulation voltage	500 V
Light source	laser red $\lambda=630$ nm
Laser class	1 (EN 60825-1)
Housing material	zinc die-cast, powder-coated
Switching indicator	LED yellow
Connection	connector M8 Pico
Power-on delay	<0.4 s
Serial mounting	—
Weight	197 g · 6.9 oz.
Tariff code	85365019
Complies with	CE, RoHS




## Fork Light Barrier High Resolution *laser red · 120 mm fork opening*





**Warranty** Our products are manufactured to stringent ISO 9001 European standards to ensure that our customers only receive the best quality.



Wiring diagram

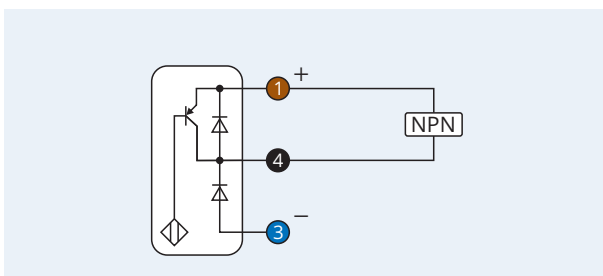

Pinout

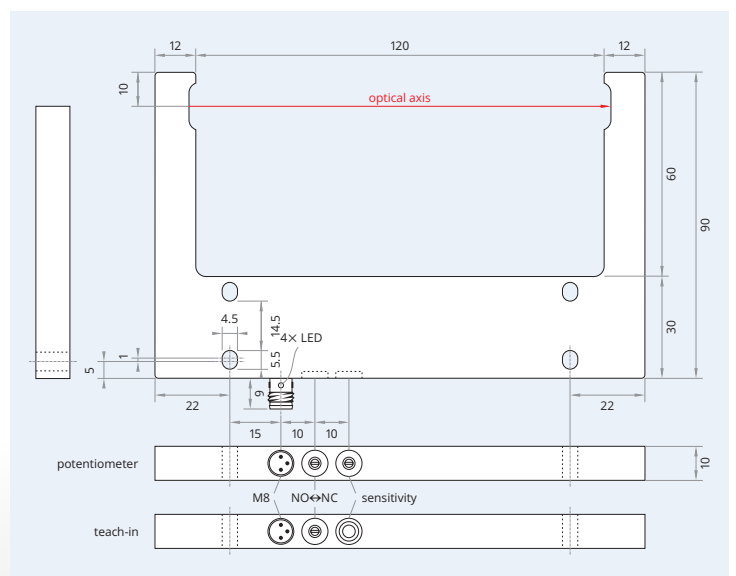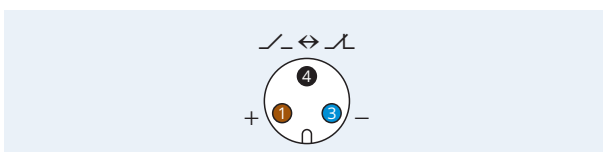

**Caution!** This device shall not be used if the safety of persons rely on its faultless function.

XECRO reserves the right to make minor changes without prior notification.